


PRODUCT SPECIFICATIONS

1x1 Beveled Edge Flatlight™ Luminaire Fixture

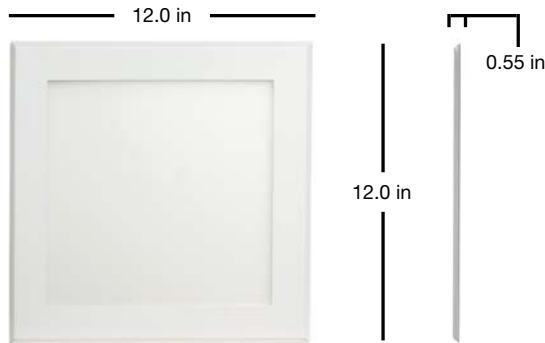

ADVANTAGES

- Internal driver allows for TruFlat® Mounting
- Edge-lit LED provides a thin energy efficient light source with excellent uniformity
- 30° bezel edge design for a sleek look
- Uses about 80%** less energy than standard household light fixtures
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces current household lights
- Environmentally positive - RoHS compliant
- 5 year limited warranty

APPLICATIONS

Suitable for dry and damp locations

HARD SURFACE



FLAT SURFACE



EMBEDDED IN TRIM



SPECIFICATIONS

Model Number	FLT11R40MD0811-A
Power	11W
AC Voltage, Frequency	120V, 60 Hz
Color Temp (nom.)	4000K
Operation Temp	- 20°C ~ 40°C
CRI	≥ 80
Lumen Output (min.)	1000 lm
Dimming	Yes*
Lifetime Rating	50,000 Hrs

PACKAGING

Weight (Flatlight) (±0.5 lb)	2.6 lbs
Mounting Plate	0.4 lb
Size (L x W x H) (±0.1 in)	12.0 x 12.0 x 0.55 in
Box Dimensions	14.0 x 14.5 x 2.6 in
Gross Weight (±0.5 lb)	4.2 lbs
UPC	8 55158 00323 2



INCLUDED IN BOX


- Mounting plate
- Installation guide
- Installation bracket
- Two-wire connector
- Grounding wire
- Wire Nuts (3)
- Junction box screws (2)
- Dry wall screws (4)
- Toggle bolts (4)

Contact Information 888-925-7494 · www.pixilighting.com

*With select dimming controls

**Compared with incandescent lighting

Polar Candela Distribution

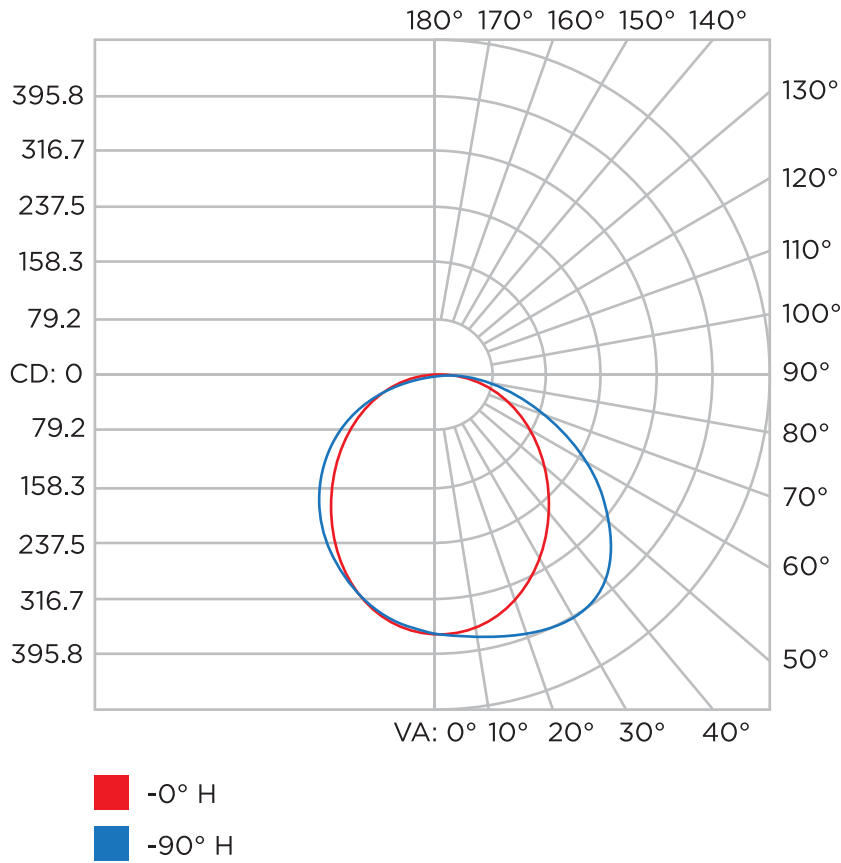

Illuminance at a Distance

	Center Beam LUX	Beam Width
1.0m	287.5 LUX	394.8cm
2.0m	71.9 LUX	789.6cm
3.0m	31.9 LUX	1184.5cm
4.0m	18.0 LUX	1579.3cm
5.0m	11.5 LUX	1974.1cm

Contact Information 888-925-7494 · www.pixi-lighting.com