


PRODUCT SPECIFICATIONS

# 1x4 Flatlight™ Luminaire Fixture

Replaces existing fluorescent 1x4 Luminaires

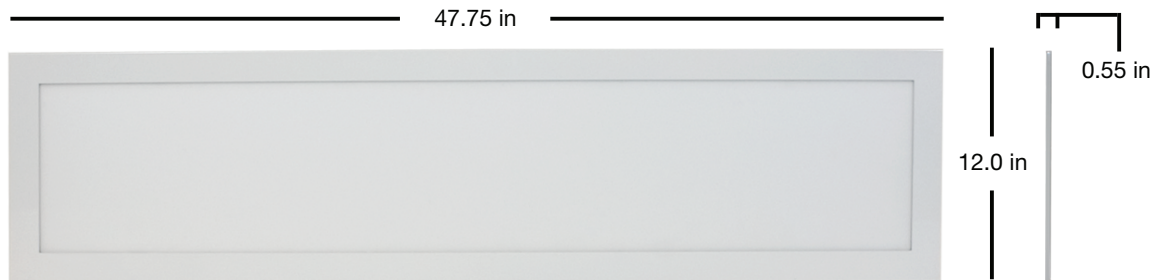

### ADVANTAGES

- Internal driver allows for TruFlat® Mounting
- Edge-lit LED provides a thin energy efficient light source with excellent uniformity
- 90° bezel edge
- Lasts 60%\* longer than standard troffer lighting
- Bright uniform light
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces fluorescent tube fixture and house hold lights
- Environmentally positive - RoHS compliant
- Dimmable with select dimmers
- 5 year limited warranty

### APPLICATIONS

Suitable for dry and damp locations



### SPECIFICATIONS

Model Number	FLT14R35MDUP44-A
Power	46W
AC Voltage, Frequency	120V, 60 Hz
Color Temp (nom.)	3500K
Operation Temp	- 20°C ~ 40°C
CRI	≥80
Lumen Output (min.)	4400 lm
Dimming	Yes**
Lifetime Rating	50,000 Hrs

### PACKAGING

Weight (±0.5 lb)	10.2 lbs
Mounting plate	2.0 lbs
Size (L x W x H) (±0.1 in)	47.75 x 12.0 x 0.55 in
Box Dimensions	51.75 x 15.5 x 2.6 in
Gross Weight	14.6 lbs
UPC	8 55158 00326 3



### INCLUDED IN BOX

- Mounting plate
- Installation guide
- Two-wire connector
- Installation bracket
- Junction box screws
- Wire Nuts (3)
- Dry wall screws (4)
- Toggle bolts (4)
- Grounding wire

Contact Information 888-925-7494 · [www.pixilighting.com](http://www.pixilighting.com)

\*Based on standard ballast average lifetime.

\*\*With select dimming controls

\*Dimmable with select dimmers

### Polar Candela Distribution

