


PRODUCT SPECIFICATIONS

2x2 Flatlight™ Luminaire Fixture

Replaces existing fluorescent 2x2 Luminaires

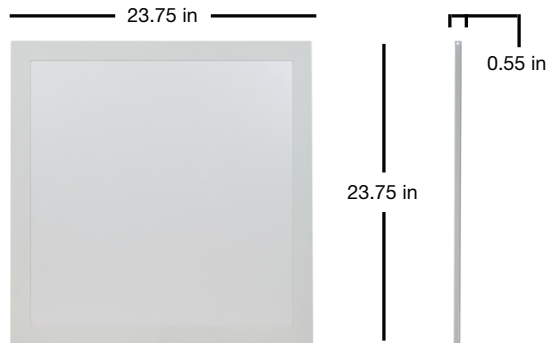

SPECIFICATIONS

Model Number	FLT22C40MD4044
Power	54W
AC Power	200~300V 50/60 Hz
Color Temp (nom.)	4000K
Operation Temp	- 20°C ~ 50°C
CRI	≥80
Lumen Output (nom.)	4900 lm
Dimming	No
Lifetime Rating	50,000 Hrs

PACKAGING


Weight (±0.5 lb)	11.5 lbs
Size (L x W x H) (±0.1 in)	23.75 x 23.75 x 0.55 in
Box Dimensions	28.1 x 29.3 x 2.6 in
Gross Weight	15.4 lbs
UPC	8 55158 00310 2

ADVANTAGES

- Internal driver allows for TruFlat™ Mounting
- Edge-lit LED provides a thin energy efficient light source
- 90° bezel edge
- Lasts 60%* longer than standard troffer lighting
- Bright uniform light
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces fluorescent fixture and tube
- Environmentally positive - RoHS compliant
- Type IC Rated
- 5 year limited warranty

APPLICATIONS


Suitable for dry locations

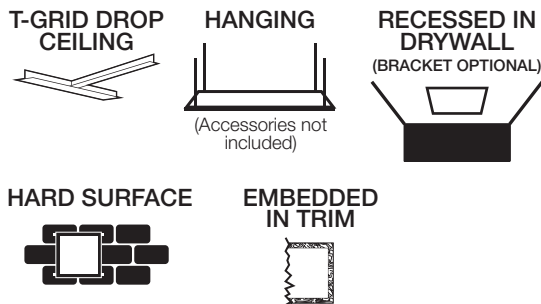

INCLUDED IN BOX

- Installation guide
- Wire nuts (3)

Polar Candela Distribution

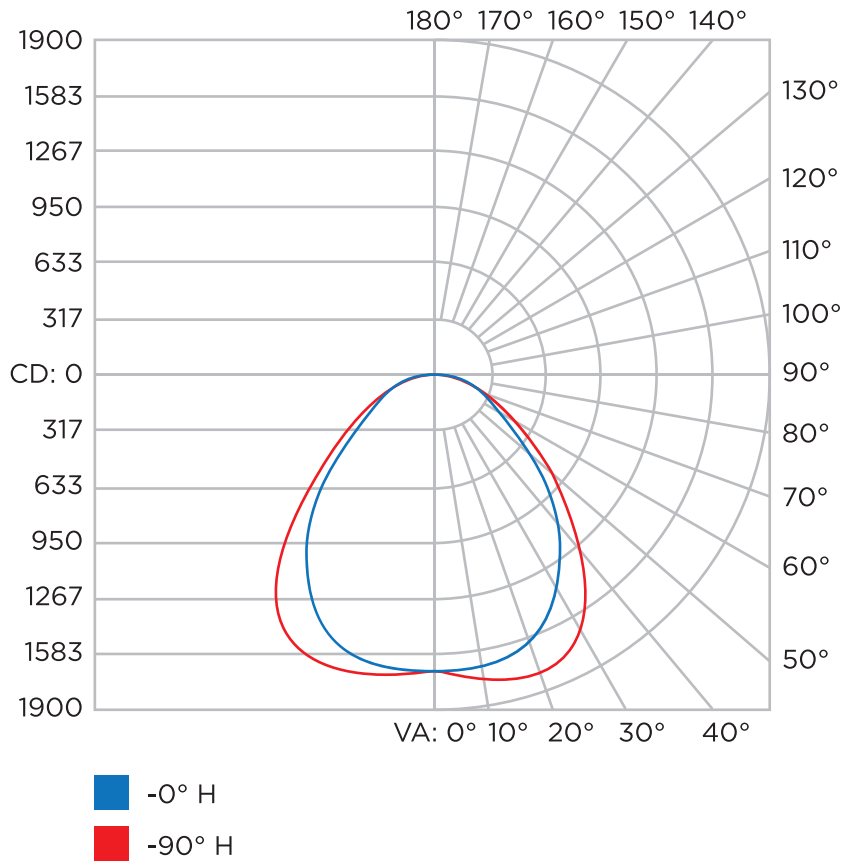

Illuminance at a Distance

