


PRODUCT SPECIFICATIONS

# 2x2 Luminaire Flatlight™ Fixture

Replaces existing fluorescent 2x2 Luminaires

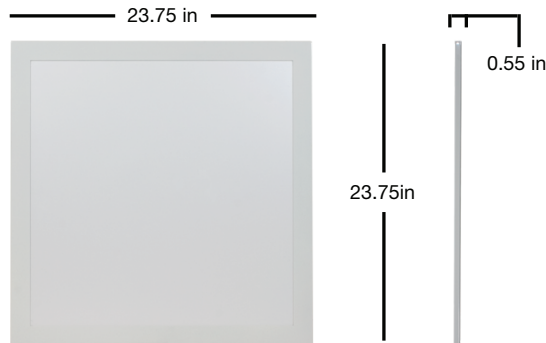

## SPECIFICATIONS

Model Number	FLT22C40MDUP44-A
Power	48W
AC Voltage, Frequency	120~277V, 50/60 Hz
Color Temp (nom.)	4000K
Operation Temp	- 20°C ~ 40°C
CRI	≥80
Lumen Output (min.)	4300 lm
Dimming	No
Lifetime Rating	50,000 Hrs

## PACKAGING


Weight (±0.5 lb)	10.0 lbs
Mounting plate	2.8 lbs
Size (L x W x H) (±0.1 in)	23.75 x 23.75 x 0.55 in
Box Dimensions	27.5 x 27 x 2.6 in
Gross Weight	15.4 lbs
UPC	8 55158 00317 1

## ADVANTAGES

- Internal driver allows for TruFlat® Mounting
- Edge-lit LED provides a thin energy efficient light source with excellent uniformity
- 90° bezel edge
- Lasts 60%\* longer than standard troffer lighting
- Bright uniform light
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Replaces fluorescent fixture and tube
- Environmentally positive - RoHS compliant
- Type IC Rated
- 5 year limited warranty

## APPLICATIONS


Suitable for dry and damp locations

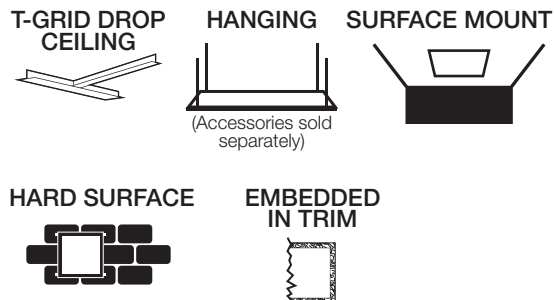

## INCLUDED IN BOX

- Mounting plate
- Installation guide
- Installation bracket
- Grounding wire
- Wire Nuts (3)
- Junction box screws (2)
- Dry wall screws (4)
- Toggle bolts (4)

### Polar Candela Distribution

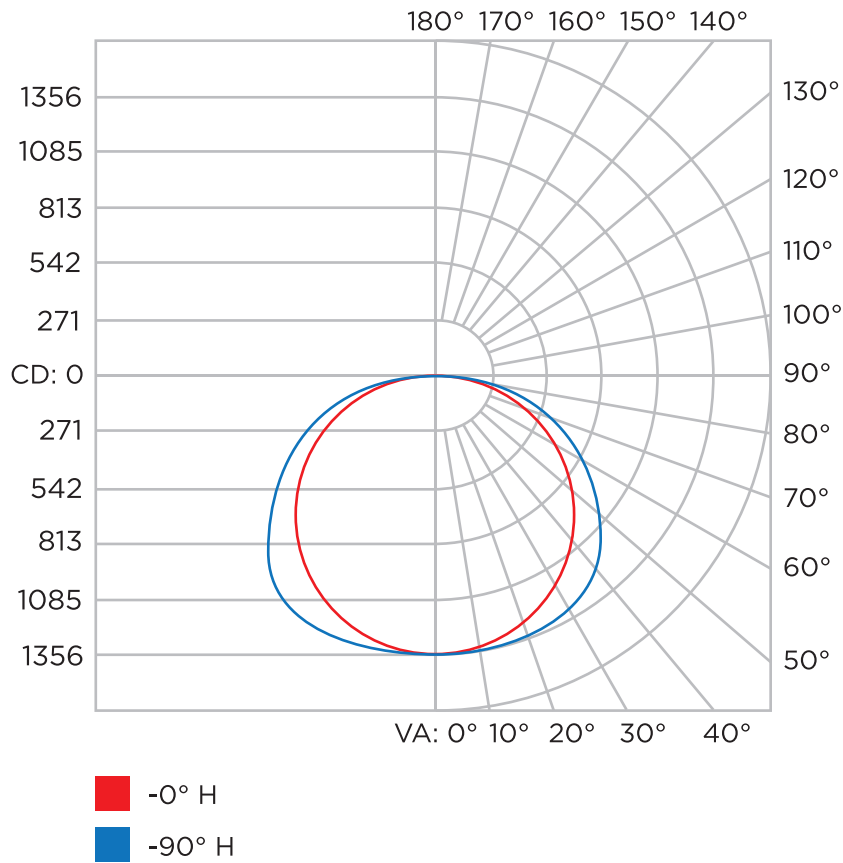

### Illuminance at a Distance

