


PRODUCT SPECIFICATIONS

# 2x4 Flatlight™ Luminaire

Drop-in replacement for existing 2x4 fluorescent troffers

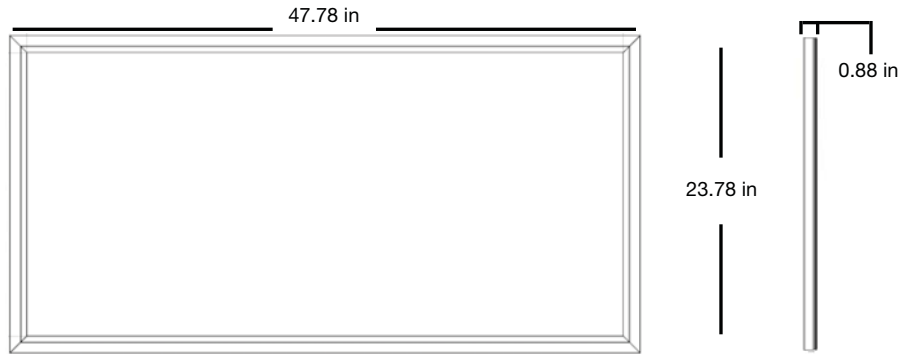

**ADVANTAGES**

- Internal driver for slim form factor
- Edge-lit LED for superior white and brightness uniformity
- 90° bezel edge
- Lasts 60%\* longer than standard troffer lighting
- A/B mode for dual-switch wiring at 100% / 50% of lumen output
- Low heat dissipation - reduce HVAC costs
- Low energy consumption
- Directly replaces fluorescent fixture and tube
- Environmentally positive - RoHS compliant
- Type IC Rated
- DLC certified - check for utility rebates
- Durable diffuser for easy cleaning
- 5 year limited warranty

**APPLICATIONS**

Suitable for dry and damp locations

**T-GRID / DROP CEILING**



**SPECIFICATIONS**

|                          |                                    |
|--------------------------|------------------------------------|
| Model Number             | MLT24C40MDUP                       |
| Power                    | 48 W                               |
| AC Power (10% Tolerance) | 120-277V, 50/60 Hz                 |
| Color Temp (nom.)        | 4000K                              |
| Operation Temp           | - 20°C ~ 40°C                      |
| CRI                      | 84                                 |
| Lumen Output (nom.)      | 4800 lm                            |
| Efficacy                 | 100 lm/W                           |
| Dimming                  | 2-switch wiring 100% / 50%         |
| Lifetime Rating          | 60,000 Hrs                         |
| Finish/Material          | White architectural grade aluminum |

**PACKAGING**

|                            |                         |
|----------------------------|-------------------------|
| Weight                     | 21.4 lbs                |
| Size (L x W x H) (±0.1 in) | 47.78 x 23.78 x 0.88 in |
| Box Dimensions             | 51.77 x 27.56 x 2.6 in  |
| Gross Weight               | 27.8 lbs                |
| UPC                        | 8 5730200504 8          |



Contact Information 888-925-7494 · [www.pixilighting.com](http://www.pixilighting.com)

\*Based on standard ballast average lifetime

**Polar Candela Distribution**

